MKTG-TRA-TPO-0.A-06/2018-ENG

made in ITALY

Taco Comfort Solutions®
A Taco Family Company

Taco Italia S.r.l. - Via G. Galilei, 89-91 - 36066 Sandrigo (VI) - ITALY
www.TacoItalia.com

Taco Italia reserves the right to make modification without prior notice

TRADE PRODUCT OVERVIEW EN

easyuse greatperformance

ES2 ADAPT

APPLICATION

Hot-water heating systems of all kinds, in domestic and commercial buildings.

For renewable solar thermal energy systems and biomass systems.

Allowed liquid temperature
from +2°C to +110°C

Operating pressure
Max 1.0 MPa - 10 bar

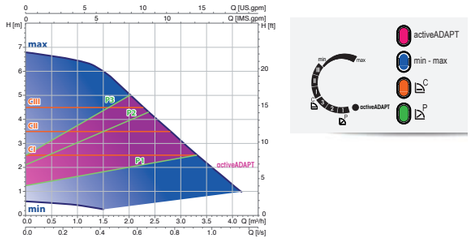

IEE ≤ 0,20 (6 mt.)

ES 2

APPLICATION

Hot-water heating systems of all kinds, in domestic and commercial buildings.

Allowed liquid temperature
from +2°C to +95°C

Operating pressure
Max 0.6 MPa - 6 bar



IEE ≤ 0,20 (6 mt.)

ES2 CA

APPLICATION

Hot-water heating systems of all kinds, in domestic and commercial buildings.

Allowed liquid temperature
from +2°C to +95°C

Operating pressure
Max 0.6 MPa - 6 bar



IEE ≤ 0,23

ES2 SOLAR

APPLICATION

Renewable energy solar thermal systems, biomass boilers and hot water heating systems of any kind.

Allowed liquid temperature
from +2°C to +110°C

Operating pressure
Max 1.0 MPa - 10 bar



IEE ≤ 0,20 (6 mt.)

ES2 PURE

APPLICATION

Domestic hot water circulation, drinking water circulation systems and similar domestic and industrial circulation systems. This circulator is suitable for drinking water only.

Allowed liquid temperature
from +2°C to +95°C

Operating pressure
Max 1.0 MPa - 10 bar





P1max = 40W

ES MAXI

APPLICATION

Hot-water heating systems of all kinds, closed cooling circuits, circulation in solar thermal and geothermal systems, for domestic and industrial circulation systems.

Allowed liquid temperature
from -10°C to +110°C

Operating pressure
Max 1.0 MPa - 10 bar

GENERAL FEATURES

- Quick and easy installation
- Venting detection
- Automatic Rotor Unlocking Program

ES2 - ES2 ADAPT

Head	Interaxis	Thread
6 mt.	130	G 1
		G 1 1/2
	180	G 1 1/2
		G 2
7 mt.	130	G 1
		G 1 1/2
	180	G 1 1/2
		G2

ES2 CA

Head	Interaxis	Thread
6 mt.	130	G 1

ES2 PURE

Head	Interaxis	Thread
4 mt.	130	G 3/4
		G 1

ES2 SOLAR

Head	Interaxis	Thread
6 mt.	130	G 1
		G 1 1/2
	180	G 1 1/2
7 mt.	130	G 1
		G 1 1/2
	180	G 1 1/2

ES MAXI

	H [m]				
Model	6	8	10	12	18
[threaded]					
ES MAXI 25	x	x	x		
ES MAXI 32	x	x	x		
[flanged]					
ES MAXI 40		x	x	x	x
ES MAXI 50		x	x	x	x